

# LifeWindow<sup>®</sup> Lite series

Networked Multi-Parameter Veterinary Monitors



DIGICARE

Reggie

No Message

Veterinary Multi-Parameter Monitor

70%

01:52 PM

ECG

78

Lead II  
Notch On  
Mode Man

SpO2

98

sPulse  
76

sPulse  
5.1

Temp 2

99.3

NIBP


120

EtCO2

38

InsCO2

1



# LifeWindow<sup>®</sup> Lite series

Networked Multi-Parameter Veterinary Monitors






## Clinically Validated Measurements

Veterinary specific algorithms.

-  **Digicare AnimalEKG™**
-  **Masimo<sup>®</sup> SET<sup>®</sup> SpO2**
-  **Suntech<sup>®</sup> VetBP**
-  **Digicare TrueTemp™**

Advanced Measurements (Optional)

-  CO2
-  A-Gas
-  IBP
-  FiO2

## Veterinary Specific Profiles

Automatically configured by patient weight. Patient Profiles adjust alarm limits and selects the correct algorithms needed for the most precise and accurate readings.

-  Large
-  Small
-  Exotic Small




## Superior Trends Technology


### Tabular

January 10	1:50 PM	1:45 PM	1:40 PM	1:35 PM	1:30 PM
ECG	70	70	70	70	70
SpO2	98	98	98	98	98
sPulse	72	72	72	72	72
PI	5.1	5.1	5.1	5.1	5.1
EiCO2	38	38	38	38	38
InaCO2	0	0	0	0	0
Resp	22	22	22	22	22
NIBP	120/80 (93)	120/80 (93)	120/80 (93)	120/80 (93)	120/80 (93)
Temp 1	99.7	99.7	99.7	99.7	99.7
Temp 2	100.4	100.4	100.4	100.4	100.4


### Graphical

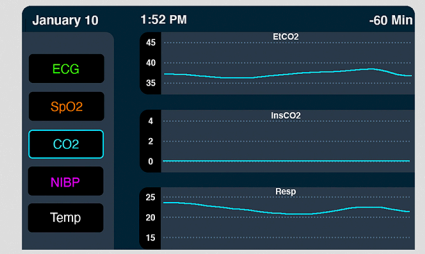


### Histogram

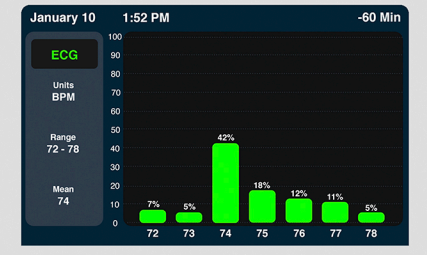


### On screen

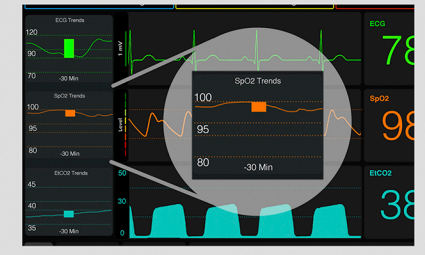


# Highlights



LW Lite

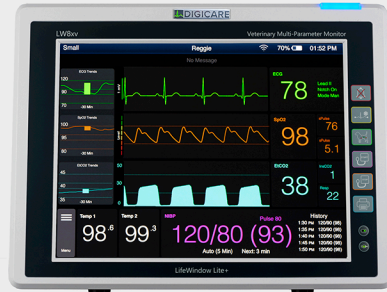


LW Lite+




8.4 inch

Super Bright  
Capacitive Touchscreen



12.1 inch




Light Weight



Wi-Fi  
Optional



L.E.D. Alarm  
Indicator




HMDI



Up to 3 Hour  
Battery

## Networking and Reports



Excel and PDF  
Reports



Remote Access  
from anywhere



Transfer Records  
to a PMS



Smart Flow  
Integration

## Additional Specifications

- Waveform sweep speeds from 6.25mm/s up to 200mm/s for high heart rate.
- Optional Nonin SpO2 for up to 450 BPM
- Optional Arrhythmia detection and ST segment elevation and depression measurements
- Capable of detecting heart rates up to 999 BPM for exotics and lab animals.

- Waveforms auto-scale for ECG and IBP
- Supports Multi-gas

### Model 8.4" LW8sv

- Dimensions W 9.25", H 6.89", D 6.49"
- Weight 8.7lb

### Model 12.1" LW8xv

- Dimensions W 12.99", H 10.43", D 7.87"
- Weight 10.5lb

Designed and Manufactured in America

## Contact Us

Email: [sales@digicarebiomedical.com](mailto:sales@digicarebiomedical.com)  
Phone: 1-561-689-0408

Learn More at  
[www.digi-vet.com](http://www.digi-vet.com)



Phone - 800.233.0210

[www.pennvet.com](http://www.pennvet.com)